

TOWN OF SMITHTOWN

SUFFOLK COUNTY, NEW YORK

Building Zone Ordinance Section 322-9.B. Table of Dimensional Regulations

| 1885 | | ZONING DISTRICT | | | | | | | | | | | | | | | | | |
|--|---------------|-----------------|----------------------|-------------------|-----------------------------|----------------|--------------------------------|-------------------|-------------------|--------|-------|-------------------|-----------------|-----------------|----------------|--------|-----------------|------------------|---------|
| | | SP. PURP. | RESIDENTIAL BUSINESS | | | | | | | | | | | INDUSTRIAL | | | | | |
| Requirement | Units | CF | R43 | R21 | R15 | R10 | RM7 | R6 | PRD | RC | RMGA | PB | ОВ | SCB | NB | СВ | WSI | LI | ні |
| Minimum lot area . | square feet | 217800 | 43560 | 21780 | 15000 | 10000 | 7500 | 217800 | 217800 | 435600 | 87120 | 7500 | 2000 | 87120 | 7500 | 5000 | 20000 8 | 30000 I | 80000 |
| Minimum lot area per dwelling unit | square feet | 217800 | 43560 | 21780 | 15000 | 10000 | ¹ 7500 | 7260 ³ | 7260 ³ | 4356 | 2500 | 7500 ⁶ | n.a. | n.a. | 7500 | n.a. | 20000 8 | 30000 | n.a. |
| Minimum lot frontage at setback line | feet | 300 | 150 | 100 | 100 | 75 | 50 ¹³ | 100 | 100 | 200 | 200 | . 50 | 100 | 200 | 50 | 50 | 100 | 100 | 200 |
| Minimum road frontage | feet | 40 | 40 | 40 | 40 | 40 | 40 | 100 | 100 | 40 | 40 | 40 | 40 | 40 | 40 | 40 | 50 | 50 | 80 |
| Minimum front yard depth | feet | 150 | 16 60 | 50 ¹⁶ | 45 | 40 | , ¹⁶ 25 | 100 | 100 | 60 | 60 | 25 | 50 | 50 | 50 | 10 | 50 | 50 | 80 |
| Minimum rear yard depth | feet | 150 | 100 | 75 | 60 | 50 | 35 | 50 | 50 | 60 | 60 | 35 9 | 50 ⁹ | 50 ⁹ | | | 50 ⁹ | 50 ⁹ | 50 9 |
| Minimum side yard width, any 1 ² | feet | 75 | 24 | 16 | 16 | 12 | 8 | 50 | 50 | 60 | 60 | 5 ⁹ | 5 ⁹ | 5 ⁹ | 5 ⁹ | 0 or 5 | 59 | 209 | 50 |
| Minimum side yard width, | feet | 150 | 60 | 34 | 34 | 28 | 18 | 100 | 100 | 120 | 120 | 15 | 15 | 15 | 15 | | 15 | 40 | 100 |
| total of both | | | | | | | | | | | | | | | | | | | |
| Maximum gross floor area ⁸ | % of lot area | 10 | 20 | 25 | 25 | 30 | 35 | 30 | 30 | 25 | 25 | 25 | 30 | 40 | 50 | 60 | 50 | 42 | 50 |
| Minimum landscape area | % of lot area | 75 | | | | | | | | | - | 25 | 20 | 15 | 10 | 5 | 8 ¹¹ | 18 ¹² | 10 |
| Maximum height | feet | 35 | 35 | 35 | 35 | 35 | 35 | 35 | 35 | 35 | 35 | 35 | 35 | 35 | 35 | 35 | 35 | 35 | 40 |
| Maximum height | stories: | 3 | 2-1/2 | 2-1/2 | 2-1/2 | 2-1/2 | 2-1 <i>1</i> 2 | 2-1/2 | 2-1/2 | 2-1/2 | 2-1/2 | 2-1/2 | 2-1/2 | 2-1/2 | 2-1/2 | 2-1/2 | | | |
| Accessory building, | | 5 | 20 | 4 20 ¹ | 4 20 ¹ | 4 20 | ¹⁴ 20 ¹⁴ | 0 | 0 | 0 | 0 | 25 | 25 | 0 | 25 | 25 | 25 | 25 | 25 |
| max occupancy of req rear yard | % | | | | | | | | | | | | | | | | Į. | | |
| Accessory building or structure, | feet: stories | 18 | 15:1 | 15:1 | 15:1 | 15:1 | 15:1 | 15:1 | 15:1 | 15:1 | 15:1 | 18 | 18 | 0 | 18 | 18 | 18 | 18 | 18 |
| maximum height | | | | | | | | | | | | | • | | | | | | |
| Accessory building, | feet | 25 | 10 | 8 8 | ⁵ 8 ¹ | ⁵ 6 | 15 4 ¹ | 5 50 | 50 | 60 | 60 | 3 | 3 | 50 | 3 | 3 | 10 | 10 | 10 |
| min distance from any lot line in rea | ryard | | | | | | | | | | | | | | | | | | |

Lots which front on streets of inadequate right-of-way width, as specified by the Town of Smithtown, may be reduced in area by not more than ten percent (10%) in order to comply with right-of-way requirements. For garage entrances in side yards, see Sec.322-15E.

Not including land required for public facilities (such as highways, recharge basins, parks and similar facilities), as determined in the review of subdivision by the Planning Board.

Except for lots one hundred ten (110) feet or less in depth which lawfully existed prior to February 9, 1950; in this case, the front yard shall be twenty-five (25) feet and the rear yard shall be thirty-five

(35) feet.

Only 4 feet when in the required front yard (See Sec.322-13).

If no dwelling unit on the site exceeds eight hundred (800) square feet in floor area, the minimum lot area per dwelling unit shall be three thousand seven hundred fifty (3,750) square feet.


Unless forty percent (40%) or more of the frontage on that side of street between two (2) intersecting streets is improved with buildings, a majority of which observe an average front yard line having a variation in dept of not more than six(6) feet, in which case no building shall project beyond the average front yard so established. front yard so established.


- 8
- 10
- Provided that all parking and dimensional requirements are met.
 See Sec.322-20 for buffer yards and screening requirements.
 A minimum lot area of forty-three thousand five hundred sixty (43,560) square feet if permitted where the proposed site is within a planned industrial park as defined in Sec. 322-24.
- 11 To be located between the parking and public right-of-way.
- The landscaped area shall include not less than eighty percent (80%) of the required front yard. 12 13
- Per Family.
 Or 750 sq.ft., whichever is less. Does not include decks or pools.
- 15
- Or 750 sq.l.r., winchever is less. Does not include decks or pools.


 Two feet for one accessory building less than 150 sq. ft. and less than 10 ft. in height.

 With respect to one fence in excess of four feet in height in one required front yard on a corner lot, the minimum front yard depth for R-10, R-15, R-21 and R-43 Districts, shall be reduced such that the total distance from the adjacent edge of road pavement to the fence shall be at least 20 feet, provided no sidewaik is installed adjacent to any such corner lot. Where a sidewalk is installed adjacent to any such corner lot, the minimum front yard depth shall be such that the total distance from the adjacent edge of road pavement to the fence shall be at least 26 feet. Includes R10S District.

SMITHTOWN ZONING SETBACKS

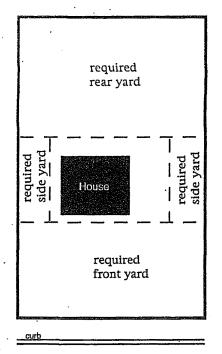

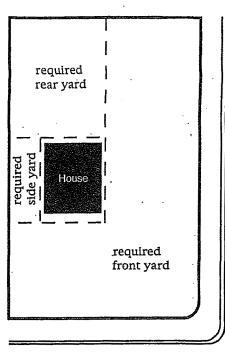


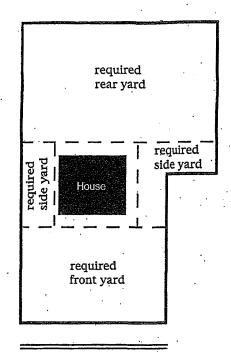



INTERIOR LOT

CORNER LOT

L-SHAPED LOT

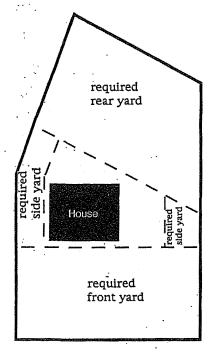





IRREGULAR LOT

THROUGH LOT BACKING UP TO A MAJOR HIGHWAY

TWO CORNER LOT